

Red-D-Arc Welderrentals

When you're ready to weld.

Red-D-Arc Welderrentals, an Airgas company, is North America's leading provider of rental welding products and services, with over 50,000 units in a fleet that includes welders, welding positioners and other welding-related equipment, for almost any type of welding process and application.

DP75 Powermate Electric Distribution Panel



10 - 120V 20A GFCI DUPLEX RECEPTACLES

2 - 120/240V 50A RECEPTACLES

30 kVA 600/480V PRIMARY TRANSFORMER

60A, SINGLE PHASE PRIMARY BREAKER



Airgas

1-866-733-3272
Rental Centers Across North America

DP75 Powermate Electric Distribution Panel

Description

The DP75 Powermate is a fully-portable, electric panel designed for the distribution of 120 volt and 240 volt, single-phase electrical power on indoor and outdoor jobsites. Primary voltage can be either 600 or 480 volt, single-phase power which is stepped-down to 120/240 volt single-phase secondary power via a 30 kVA transformer. Ten 20 amp, 120 volt GFCI duplex receptacles are provided for the operation of hand tools, lighting fixtures and other electrical equipment. In addition, there are two 50 amp, 120/240 volt single-phase receptacles (protected by GFCI breakers), for the operation of larger power equipment, as well as for supplying power to up to two SB80 Splitter Boxes for difficult to access locations on the jobsite. The DP75 is CSA certified to NEMA 3 specifications, and is constructed from 14 gauge, 304 stainless steel for enhanced durability and weather protection.

Features

- 10 - 120 volt, 20 amp Hubbell duplex T-slot GFCI outlets, with weatherproof covers and 20 amp circuit breakers
- 2 - 120/240 volt, 50 amp Hubbell outlets, with weatherproof covers and 50 amp GFCI circuit breakers
- 1 - 30 kVA, 600/480 volt primary, 120/240 volt secondary transformer



All circuit breakers can be readily accessed from the side of the DP75 panel via a stainless steel door




All receptacles are mounted high on the panel for both convenience and safety

Specifications

WEIGHT	674 lb (306 kg)
DIMENSIONS	H: 32" (813 mm) W: 22" (559 mm) D: 33" (838 mm)
TRANSFORMER	Marcus 600/480V primary, 120/240V secondary
120V RECEPTACLES	Hubbell duplex T-slot GCFI, 120V, 20A
120V CIRCUIT BREAKERS	Square D 20A
120V/240V RECEPTACLES	Hubbell 120V/240V, 50A
120/240V CIRCUIT BREAKERS	Square D 50A GFCI
MAIN BREAKER	Square D 60A, single phase

Optional SB80 Splitter Box

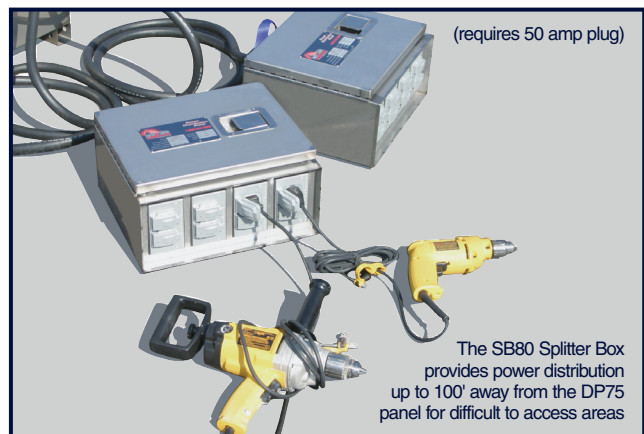

(requires 50 amp plug)

The SB80 Splitter Box provides power distribution up to 100' away from the DP75 panel for difficult to access areas